


## SCHNELL DOUBLE SECTION WALL MOUNTED CABINET

SCHNELL double section wall mount cabinet is designed for secure, space-efficient installation of networking and telecom equipment. It features a swing-out rear section for easy cable access, a lockable front glass door, and removable side panels. Built from cold-rolled steel, it ensures reliable equipment protection in office, data center, or industrial environments.

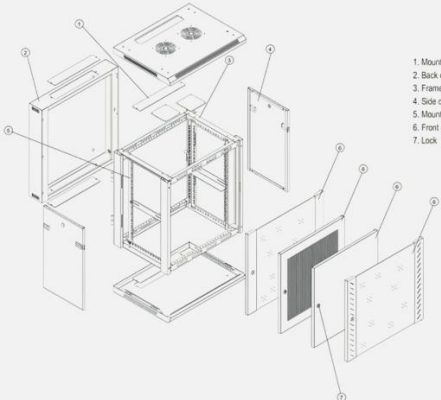

### DIAGRAM & CONSTRUCTION

<p>Cabinet Body : SPCC Cold Rolled Steel</p> <p>Front Door : 5 mm Tempered Glass with Steel Frame</p> <p>Single Perforated (Optional)</p>		<p>Surface Finish : Black Powder Coating</p> <p>Side Panels : Removable, Steel</p> <p>Rear Swing Section : Hinged, Steel</p>
---	--	--

### SURFACE COATING & COLOR

<p>All Steel Parts Color : Powder Coated</p> <p>: Black (Standard)</p>	<h3>PHYSICAL CHARACTERISTICS</h3> <p>Sizes Available (U Height) : 6U, 9U, 12U, 15U, 18U</p> <p>Mounting Profile : 19" Standard (Adjustable Rails)</p> <p>Load Capacity : Up to 60 Kg</p> <p>Swing Section : 120° opening with secure latch</p> <p>Cable Entry : Top &amp; Bottom (with cover plates)</p> <p>Lock Type : Lockable Front and Rear Doors</p> <p>Color : Black (RAL 9005)</p>
--	---

### KEY FEATURES

- Double section design for easy rear access
- Lockable front door with tempered glass
- Adjustable 19" mounting rails
- Cable management through top and bottom panels

### KEY APPLICATIONS

- Network distribution in telecom rooms
- Wall-mounted equipment enclosures
- Access control and surveillance systems
- Industrial or office structured cabling

### REACTION TO FIRE

<p>Flammability : UL94V-0 / IEC 60754</p> <p>Surface Coating : Electrostatic Powder Coated</p> <p>Operating Temperature : -40°C to +80°C</p> <p>Humidity Resistance : ≤85% RH at 30°C</p>	<h3>STANDARDS</h3> <ul style="list-style-type: none"> <li>• IEC 60297 – Mechanical structures for 19" racks</li> <li>• EN 61587-1 – Climatic and mechanical test compliance</li> <li>• IEC 60068 – Environmental testing</li> <li>• UL 94V-0 – Flammability standard</li> <li>• ISO 9001 – Quality Assurance</li> </ul>
---	---

**ACCESSORIES**

Accessory	Description	Material	Quality
Front Door	Lockable door with 5mm toughened glass panel and steel frame	5mm Toughened Glass + 1.2mm SPCC Steel	Durable & Shock-Resistant
Allen Wrench	Tool used for assembling cabinet components	Steel	Corrosion Resistant
Mounting Panel	Internal panel for equipment or cable support	1.2mm SPCC Cold Rolled Steel	High Strength
Cable Entry Cover	Removable cover for top or bottom cable access points	1.2mm SPCC Cold Rolled Steel	Powder Coated
Fan Cover	Protective shield for ventilation fans	1.2mm SPCC Cold Rolled Steel	Ventilated Design
Mounting Profile	Vertical mounting rails for rack equipment	1.2mm SPCC Cold Rolled Steel	Adjustable & Rigid
Lock with Keys	Integrated locking system with 2 keys	Metal	Secure & Durable
Cabinet Frame	Structural skeleton of the cabinet	1.2mm SPCC Cold Rolled Steel	Rigid & Sturdy
M6 Square Nuts	Used for fastening devices within the rack	Steel	Zinc-Plated, Rustproof
M6 Head Screws	For securing equipment and accessories	Steel	Zinc-Plated, Precision Fit
Side Panels	Removable side covers with locking option	1.2mm SPCC Cold Rolled Steel	Easy Access, Strong

**PART NUMBER**

Part Number	Description	Dimension (W x D x H in mm)
SCZ-1010W65506AS	SCHNELL 6U 600/550 DOUBLE SECTION WALL MOUNTED CABINET	600 X 550 X 368
SCZ-1010W65509AS	SCHNELL 9U 600/550 DOUBLE SECTION WALL MOUNTED CABINET	600 X 550 X 501
SCZ-1010W65512AS	SCHNELL 12U 600/550 DOUBLE SECTION WALL MOUNTED CABINET	600 X 550 X 635
SCZ-1010W65515AS	SCHNELL 15U 600/550 DOUBLE SECTION WALL MOUNTED CABINET	600 X 550 X 769
SCZ-1010W6606AS	SCHNELL 6U 600/600 DOUBLE SECTION WALL MOUNTED CABINET	600 X 600 X 368
SCZ-1010W6609AS	SCHNELL 9U 600/600 DOUBLE SECTION WALL MOUNTED CABINET	600 X 600 X 501
SCZ-1010W6612AS	SCHNELL 12U 600/600 DOUBLE SECTION WALL MOUNTED CABINET	600 X 600 X 635
SCZ-1010W6615AS	SCHNELL 15U 600/600 DOUBLE SECTION WALL MOUNTED CABINET	600 X 600 X 769